



DIELECTRIC FILTER PRELIMINARY SPECIFICATION

Part No.: **DDP0810R806-847P030B**

Customer: _____


Date:2020-1-18

Written by	Checked by	Approval

ELECTRICAL SPECIFICATIONS

ITEM	Low >>> ANT	High <<< ANT	UNIT	
1	Center Frequency[fo]	806.0	847.0	MHz
2	Bantwidth[BW]	fo ±15.0	fo ±15.0	MHz
3	Insertion Loss in BW	5.0 max.	5.0 max.	dB
4	Ripple in BW	4.0 max.	4.0 max.	dB
5	VSWR in BW	1.5:1 max	1.5:1 max	Ratio
6	Attenuation [Absolute Value]	50.0 min. @ [832~862] MHz 30.0 min. @ [826] MHz	50.0 min. @ [791~821] MHz 30.0min. @ [826] MHz	dB
7	Input Power	3.0 max.		W
8	In/Out Impedance	50		Ω
9	Operation Temperature Range	-40 to +85		°C

MECHANICAL SPECIFICATIONS

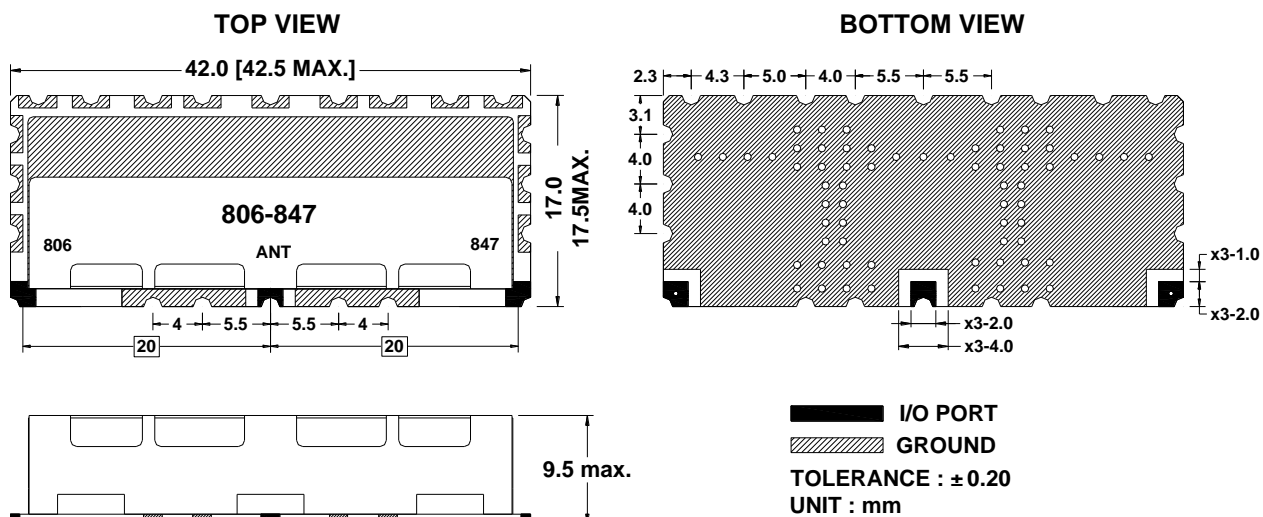


TD3619C 矢量网络分析仪

1 当前通道/曲线 2 响应 3 激励源 4 频标/分析 5 仪器状态

Resize

曲线1 S22 对数 5.000dB/ 基准 5.000dB [F3]
 曲线2 S21 对数 10.00dB/ 基准 10.00dB [F3]
 曲线3 S32 对数 10.00dB/ 基准 10.00dB [F3]

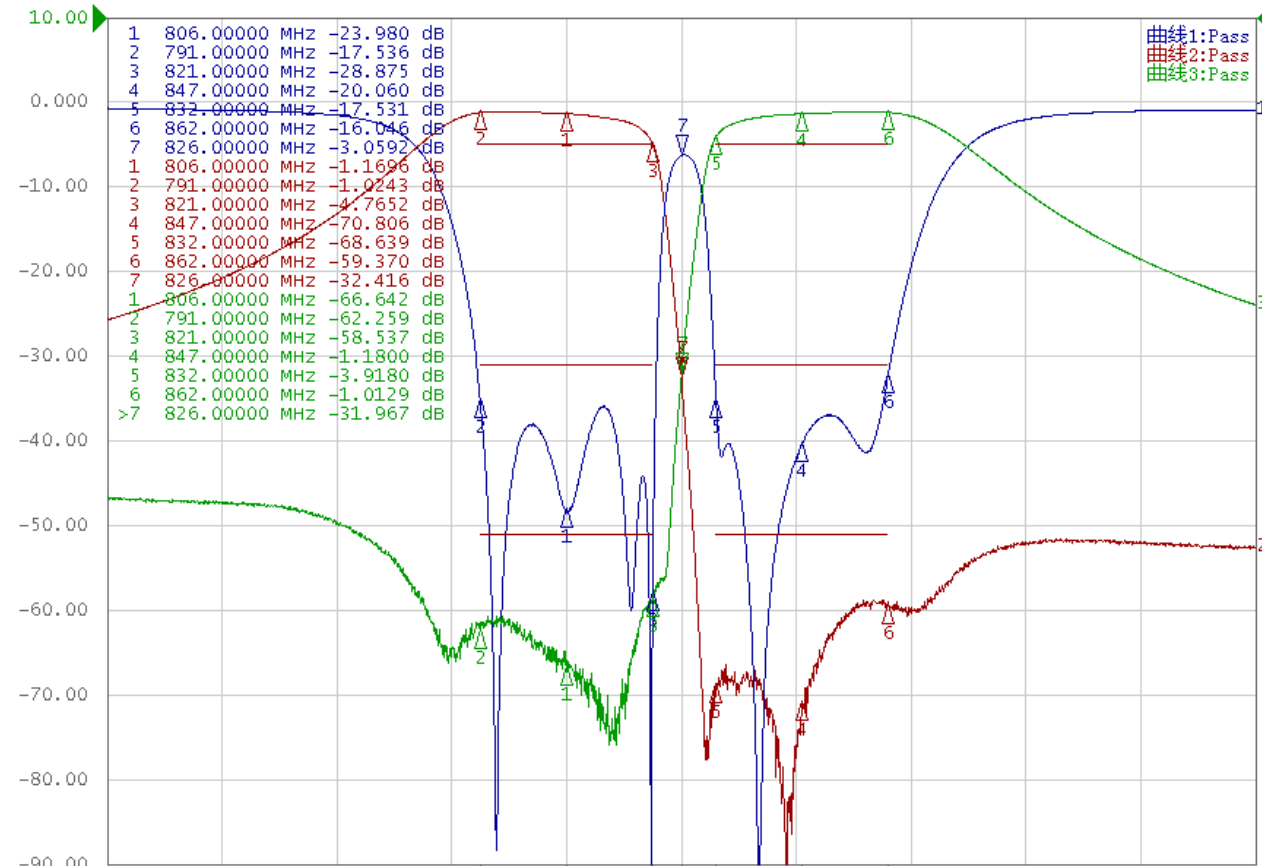

- 系统
- 打印
- 取消打印
- 打印机设置...
- 颠倒颜色
打开
- 屏幕拷贝
- 多端口测试装置
设置
- 杂项设置
- 背光
打开
- 硬件
版本
- 服务菜单
- 帮助
- 退出
- 返回

1 Center 826 MHz

IFBW 70 kHz

带宽 200 MHz Cor

测量 终止 外基准 服务

2020-02-22 13:52