


## 1.0 ELECTRICAL SPECIFICATION

ITEMS		ANT >> Low	ANT >> High	UNIT
1.1 Center Frequency [fo]		2535.0	2655.0	MHz
1.2 Bandwidth [BW]		fo± 35.0 [ 2500.0 ~ 2570.0 ]	fo± 35.0 [ 2620.0 ~ 2690.0 ]	MHz
1.3 Insertion Loss in BW		3.5	3.5	dB max.
1.4 Ripple in BW		1.8	1.8	dB max.
1.5 Return Loss in BW	<input checked="" type="checkbox"/> ANT Port			dB min.
1.6 V S W R in BW	<input type="checkbox"/> ALL Port	1.4	1.4	max.
1.7 Attenuation <input checked="" type="checkbox"/> Absolute Value <input type="checkbox"/> Relative Value		50.0 dB min. @ [ 2620.0 ~ 2650.0 ]	50.0 dB min. @ [ 2500.0 ~ 2530.0 ]	MHz
		30.0 dB min. @ [ 2595.00 ~ ]	30.0 dB min. @ [ 2595.00 ~ ]	MHz
		dB min. @ [ ~ ]	dB min. @ [ ~ ]	MHz
		dB min. @ [ ~ ]	dB min. @ [ ~ ]	MHz
1.8 Isolations		dB min @ [ ~ ]		MHz
		dB min @ [ ~ ]		MHz
1.9 Input Power		3.0		W max.
1.10 In/Out Impedance		50 Ω		
1.11 Operation Temperature Range		-40°C to +85°C		

## 2.0 MECHANICAL SPECIFICATION

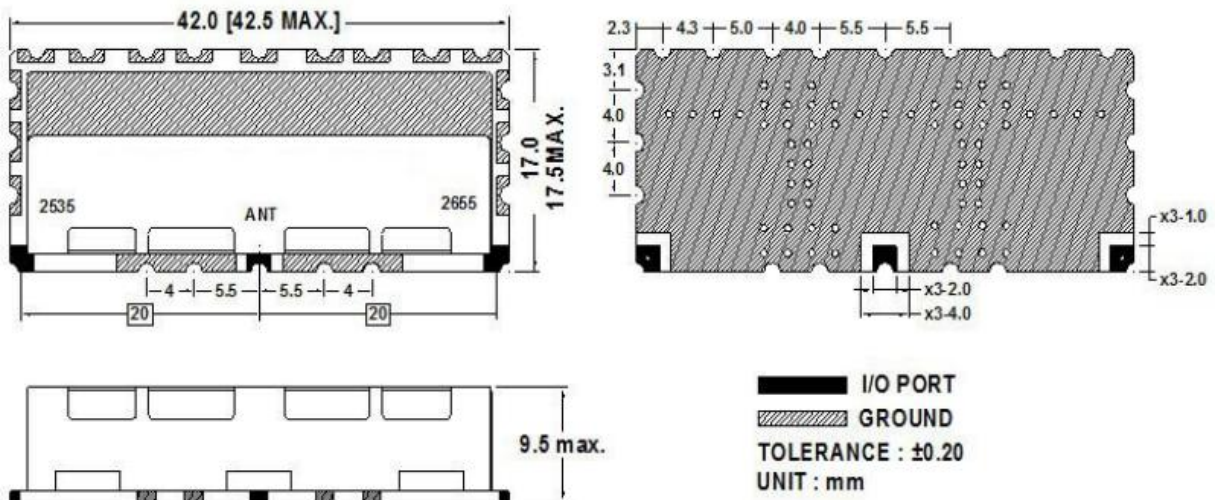

### 3.0 PLOT DATA

